

产品规格书

SPECIFICATION

客户Customer:

产品型号Model. NO: MINI66C Series (明装侧透光防水灯)

文件编号Document. NO:

版次 REV NO: A1.1

描述Description:

- 型号 (P/N) : MINI66C1-1W, MINI66C2-2W, MINI66C4-2W
- 功率 Power: 1W, 2W
- 透光 Side light: 1 holes, 2 holes, 4 holes
- 发光颜色 Color Temp: Red, Green, Blue, Warm White, Neutral white, Cold White, RGB, RGBW

CE

RoHS




客户确认	审核	拟制

■ Product Image (产品图片)



●Feature (特点)	◆ Applications (应用)
● Small size and Ultrathin (小巧超薄)	◆ Outdoor Lighting (户外照明)
● Constant voltage input (恒压输入)	◆ Trail lighting (步道照明)
● OSRAM LED (欧司朗 LED)	◆ Art lighting (艺术照明)
● Supports PWM dimming (PWM 调光)	◆ Auxiliary lighting (辅助照明)
● Aluminum (铝材质)	◆ Floor decoration (地板装饰)

■ Dimensions (产品尺寸)

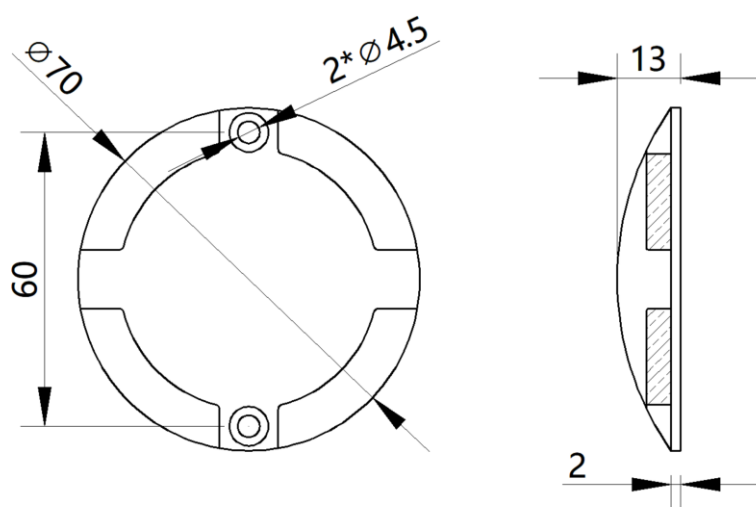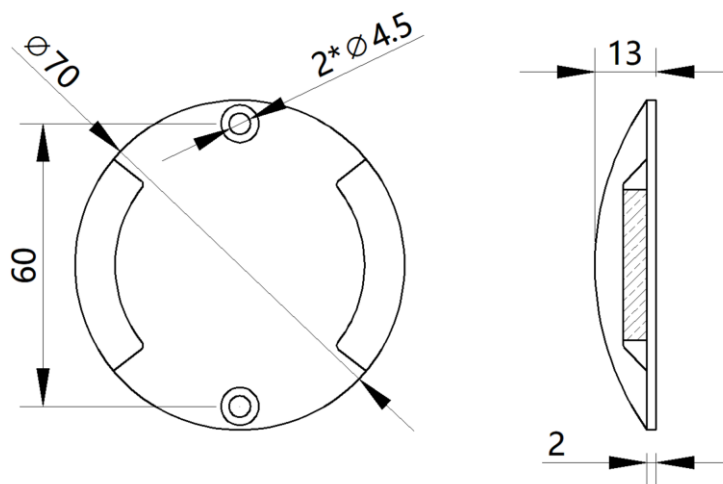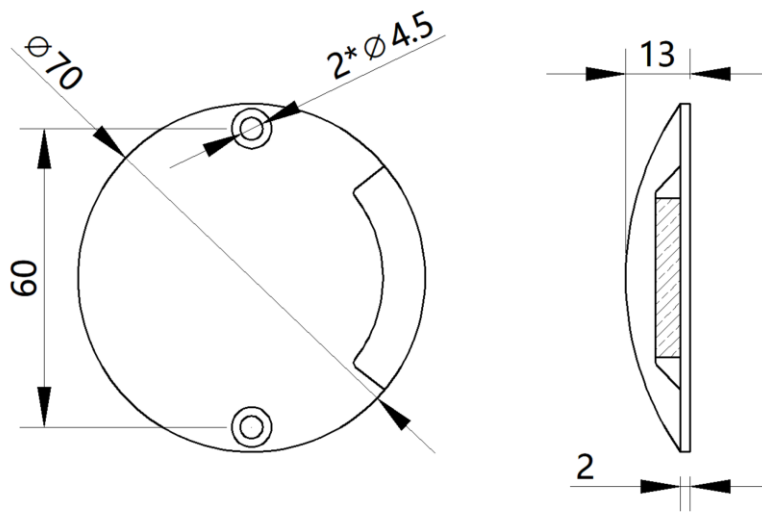

单位 Unit: mm

Installation (安装方式): Surface mounted (明装)

Light body material (灯体材料): Aluminum (铝)

Appearance color (外观颜色): Silver (银), Black (黑), Chrome (镀铬)

Cable (出线): Silicone cable (硅胶电缆), 490mm

Notes (备注):

1.All dimensions are in millimeters. (所有尺寸以毫米为单位)


2.Tolerance is ± 0.5 unless otherwise noted. (公差为 ± 0.5 , 线材 ± 5 , 除非另有说明).

■ Characteristic parameters (特性参数)

Absolute Maximum Rating 室内使用时的特性参数(At TA=25°C)

Model	Voltage	Power	Side light	Luminous flux
MINI66C1-1W	DC12/24V	1W	1	80-130 Lm
MINI66C2-2W	DC12/24V	2W	2	150-200 Lm
MINI66C4-2W	DC12/24V	2W	2	150-200 Lm

■ Wiring diagram (接线示意图)

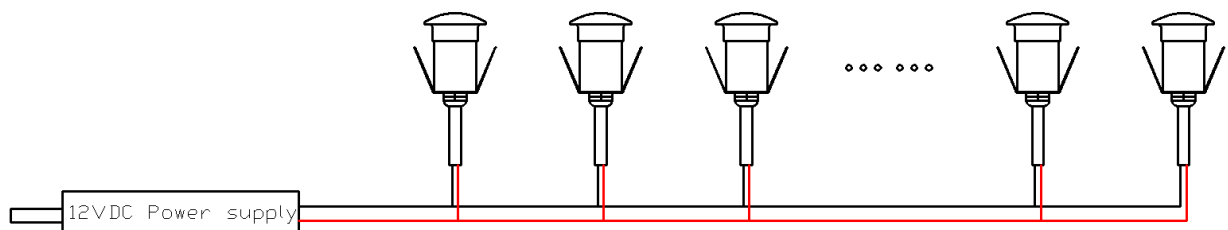

■ Packaging Information (包装资料)

- Neutral white box (中性白盒)



- Neutral outer box (中性外箱)

